



AE-14/AE-8

EXPANDER CABINETS



Features


- Total Expansion Card Capacity:
AE-14 - 14 Cards
AE-8 - 8 Cards
- Size (WxHxD):
AE-14 - 19" x 27 3/8" x 4 5/8"
(483 mm x 695 mm x 117 mm)
AE-8 - 16" x 17" x 3 7/8"
(406 mm x 432 mm x 98 mm)




P/N See Chart

Description

The AE-8 and AE-14 Expander Cabinets accommodate up to 8 and 14 respectively standard size SLCE-127, RLY-5, or other stacker bracket sized cards.

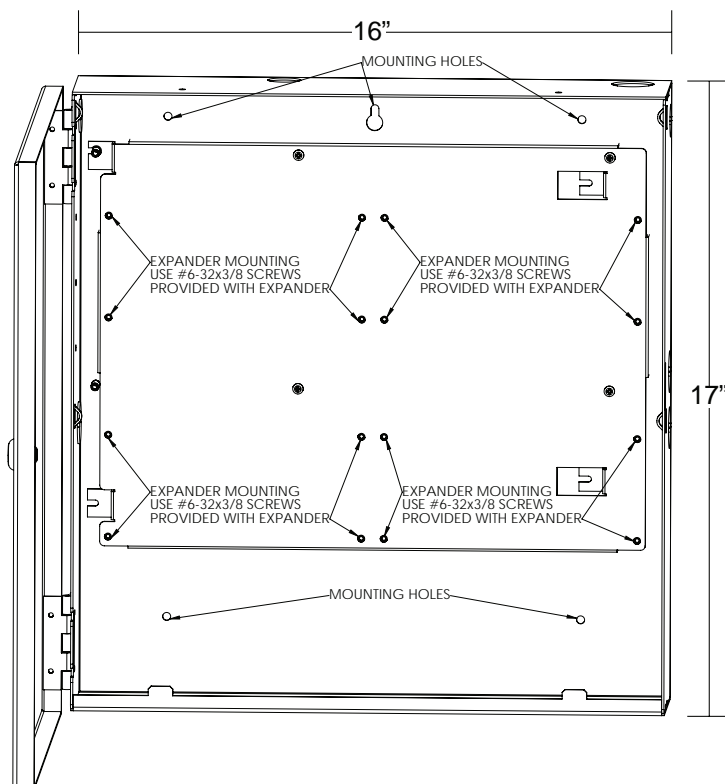

AE-8 Cabinet Dimensions

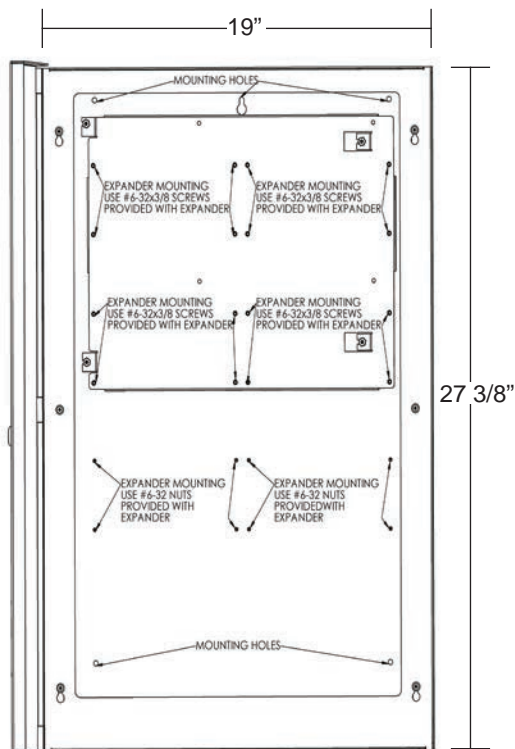

AE-14 Cabinet Dimensions

Installation

1. Secure the AE-14/AE-8 Enclosure to a suitable surface using #8 screws located in four of the five mounting holes provided.
2. Four Expansion devices can be installed using in the upper location shown using the #6 sized screw that is 32 threads per inch and 1/2 of an inch long. An additional four expanders can be stacked on top of the upper four.

AE-14 ONLY: Two additional Expanders can be installed using the lower locations. An additional four expanders can then be stacked on top of these.

Ordering Information		
Model Number	Description	P/N
AE-8	Cabinet, Expander, AE-8	98622
AE-14	Cabinet, Expander, AE-14	98621

Note: Approvals/Listings maintained by and manufactured by Potter Electric Signal Company.

The seller makes no warranties, express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, except as expressly stated in the seller's sales contract or sales acknowledgment form. Every attempt is made to keep our product information up-to-date and accurate. All specific applications cannot be covered, nor can all requirements be anticipated. All specifications are subject to change without notice.



1102 Rupcich Drive
 Millennium Park
 Crown Point, IN 46307
 TEL: (219) 663-1600 FAX: (219) 663-4562
 e-mail: info@janusfiresystems.com
www.janusfiresystems.com