



# MAS-1

## MOMENTARY ABORT STATION



P/N: 18847

### Features

- Deadman Style Abort
- SPST Contacts
- Flush or Surface Mount
- Mounts to Standard UL Listed 2-Gang Switch Box




### Description

The Janus Fire Systems® MAS-1 Momentary Abort Station provides pushbutton activated system abort capabilities. Abort for the MAS-1 is achieved with a yellow deadman style mushroom head pushbutton. The MAS-1 has a stainless steel faceplate with functional markings and mounts to a standard UL Listed 2-gang switch box.

### Operation

The MAS-1 abort function is initiated by pressing and holding the yellow pushbutton.

### Dimensions

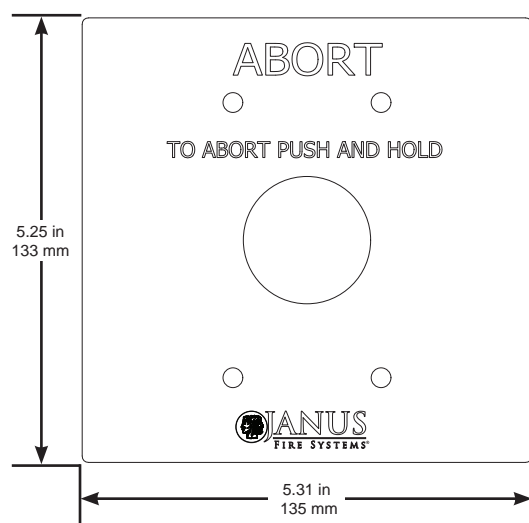

### Schematic





Specifications	
Temperature:	32° to 120°F (0° to 49°C)
Humidity:	90% Relative Humidity at 100°F
Weight:	1.2 lbs (0.5 kg)
Dimensions:	5.25 in H x 5.31 in W x 2.95 in D (133 mm x 135 mm x 75 mm)
Color:	Face Plate – Stainless Steel with black lettering Mushroom Head Pushbutton – Yellow
Alarm Contacts (SPST) Rating:	4 amps at 30 VAC; 0.5 amps at 30 VDC
Terminal Connections:	2 x 16 AWG, 1 x 14 AWG

### Ordering Information

Model	P/N	Description	Ship Wt. lb (kg)
MAS-1	18847	Momentary Abort Station	1.2 (0.5)
N/A	99997	N.C. Contact Block - Red	0.1 (0.05)
N/A	99998	N.O. Contact Block - Green	0.1 (0.05)

*Note: UL file number S24729.*

The seller makes no warranties, express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, except as expressly stated in the seller's sales contract or sales acknowledgment form. Every attempt is made to keep our product information up-to-date and accurate. All specific applications cannot be covered, nor can all requirements be anticipated. All specifications are subject to change without notice.



1102 Rupcich Drive  
 Millennium Park  
 Crown Point, IN 46307  
 TEL: (219) 663-1600 FAX: (219) 663-4562  
 e-mail: [info@janusfiresystems.com](mailto:info@janusfiresystems.com)  
[www.janusfiresystems.com](http://www.janusfiresystems.com)