

MAS-2

MAINTAINED ABORT STATION



P/N: 18848

Features

- Maintained Style Abort
- SPST Contacts
- Flush or Surface Mount
- Mounts to Standard 2-Gang Switch Box


Description

The Janus Fire Systems® MAS-2 Maintained Abort Station provides pushbutton activated system abort capabilities. Abort for the MAS-2 is achieved with a yellow maintained style mushroom head pushbutton. The MAS-2 Maintained Abort Station has a stainless steel faceplate with functional markings and mounts to a standard 2-gang switch box.

Operation

The MAS-2 abort function is initiated by pressing the yellow pushbutton.

Dimensions

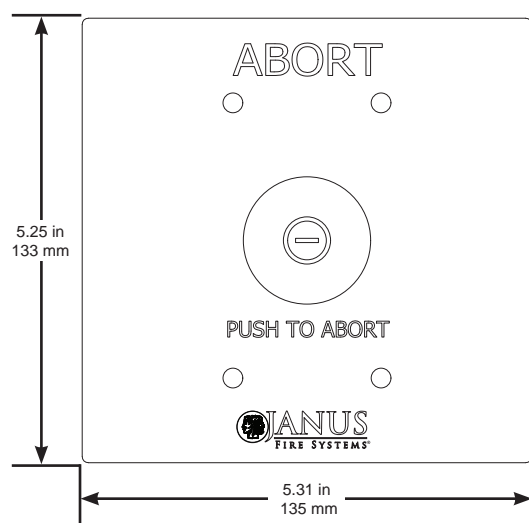

Schematics





Specifications	
Temperature:	32° to 120°F (0° to 49°C)
Humidity:	90% Relative Humidity at 100°F
Weight:	1.2 lbs (0.5 kg)
Dimensions:	5.25 in H x 5.31 in W x 2.95 in D (133 mm x 135 mm x 75 mm)
Color:	Face Plate – Stainless Steel with black lettering Mushroom Head Pushbutton – Yellow
Alarm Contacts (SPST) Rating:	.5 amps at 110 VDC 4 amps at 415 VAC
Terminal Connections:	2 x 16 AWG, 1 x 14 AWG

Ordering Information

Model	P/N	Description	Ship Wt. lb (kg)
MAS-2	18848	Maintained Abort Station (See Note 1)	1.2 (0.5)
N/A	99997	N.C. Contact Block - Red	0.1 (0.05)
N/A	99998	N.O. Contact Block - Green	0.1 (0.05)

Note 1: MAS-2 Maintained Abort Station is not UL approved. UL does not allow maintained abort stations.

The seller makes no warranties, express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, except as expressly stated in the seller's sales contract or sales acknowledgment form. Every attempt is made to keep our product information up-to-date and accurate. All specific applications cannot be covered, nor can all requirements be anticipated. All specifications are subject to change without notice.



1102 Rupcich Drive
 Millennium Park
 Crown Point, IN 46307
 TEL: (219) 663-1600 FAX: (219) 663-4562
 e-mail: info@janusfiresystems.com
www.janusfiresystems.com