


# LOS-1

## KEYED LOCK-OUT STATION



P/N: 18849

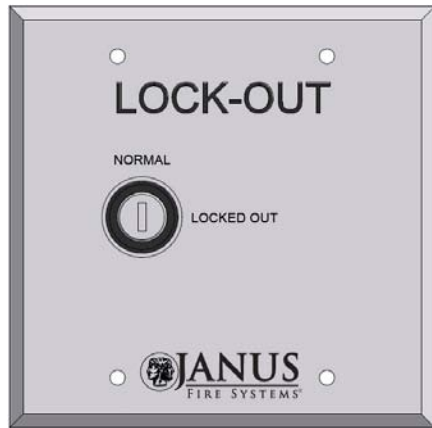

### Features

- Flush or Surface Mount
- Mounts to Standard UL Listed 2-Gang Switch Box
- Key Removable in Both Positions
- Standard with two (2) N.C. contacts


### Description

The Janus Fire Systems® LOS-1 Keyed Lock-Out Station provides a keyed method to disconnect and electrically lock-out the releasing circuit of a fire suppression system. The LOS-1 comes with a key that is removable in either the normal or locked-out position. The LOS-1 has a stainless steel faceplate with functional markings and mounts to a standard UL Listed 2-gang switch box.


### Operation

To lock-out, insert key and turn to locked-out position. Then remove key.

### Dimensions

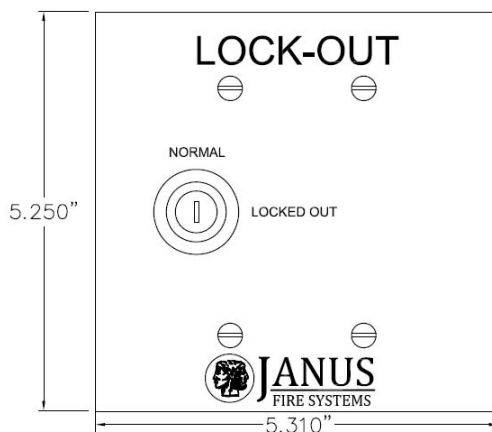

### Schematic

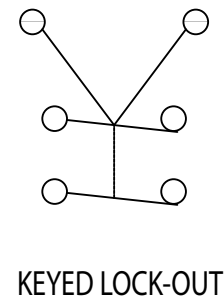



## Specifications

Temperature:	32° to 120° F (0° to 49° C)
Humidity:	90% Relative Humidity at 100° F
Weight:	1.2 lbs (0.54 kg)
Dimensions:	5.25 in H x 5.31 in W x 3.46 in D (133 mm x 135 mm x 88 mm)
Color:	Face Plate – Stainless Steel with black lettering
Contacts Rating:	4 amps at 415 VAC, 0.5 amps at 110 VDC
Terminal Connections:	2 x 16 AWG, 1 x 14 AWG

## Ordering Information

Model	P/N	Description	Ship Wt. lb (kg)
LOS-1	18849	Keyed Lock-Out Station	1.2 (0.5)
N/A	99997	N.C. Contact Block - Red	0.1 (0.05)
N/A	99998	N.O. Contact Block - Green	0.1 (0.05)
N/A	99996	Replacement Key	0.1 (0.05)

*Note: UL file number S24729.*

The seller makes no warranties, express or implied, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose, except as expressly stated in the seller's sales contract or sales acknowledgment form. Every attempt is made to keep our product information up-to-date and accurate. All specific applications cannot be covered, nor can all requirements be anticipated. All specifications are subject to change without notice.



1102 Rupcich Drive  
 Millennium Park  
 Crown Point, IN 46307  
 TEL: (219) 663-1600 FAX: (219) 663-4562  
 e-mail: [info@janusfiresystems.com](mailto:info@janusfiresystems.com)  
[www.janusfiresystems.com](http://www.janusfiresystems.com)